



CAPACITIES: VALENT VPR SERIES

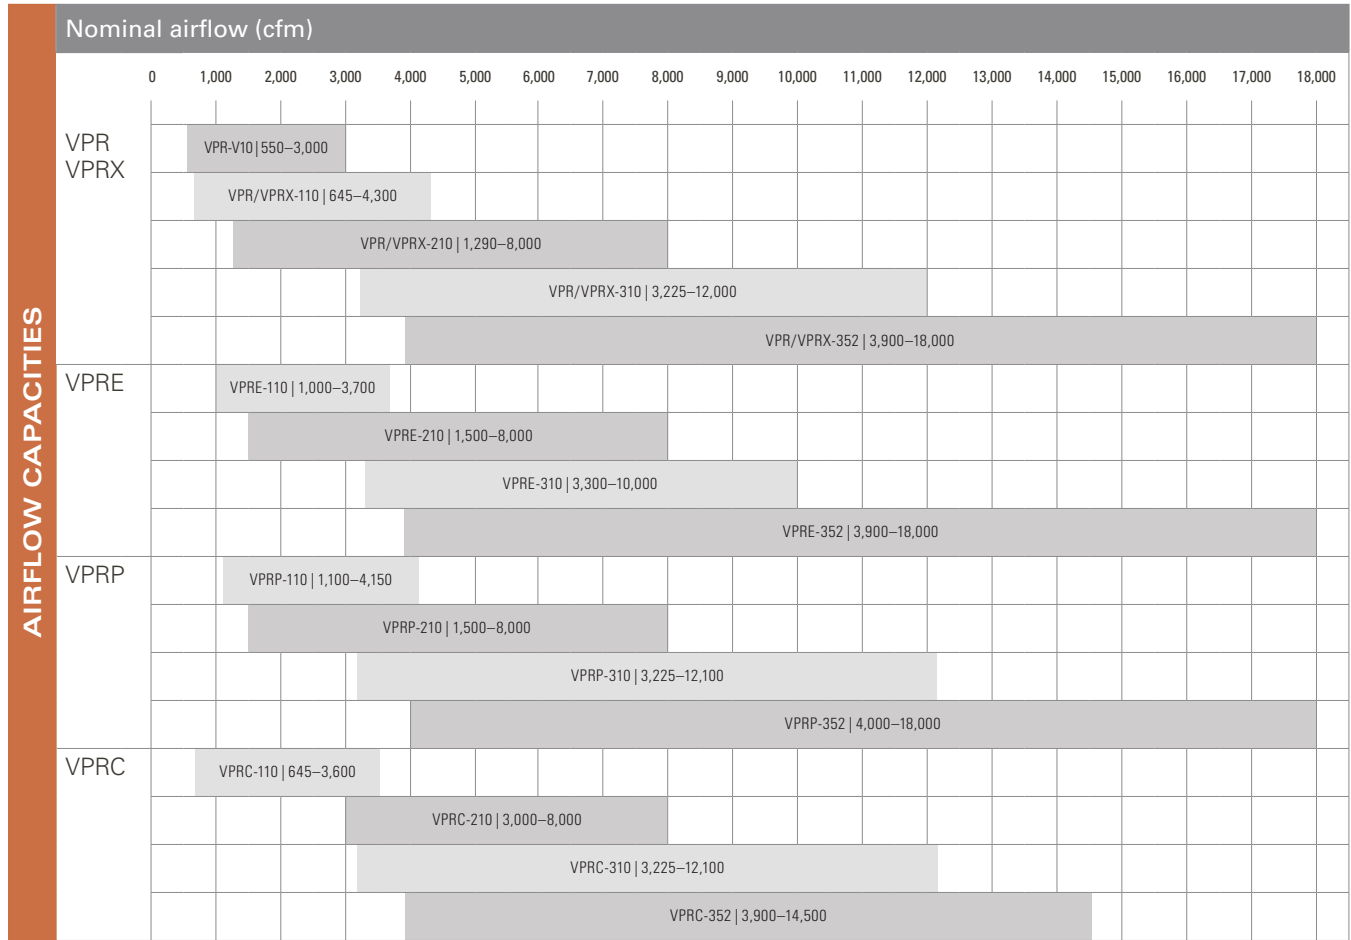

Airflow ranges are based on packaged DX cooling; indirect gas heating; 100% outdoor air; 1.5 in. wg supply external and 0.5 in. wg return air static pressure.

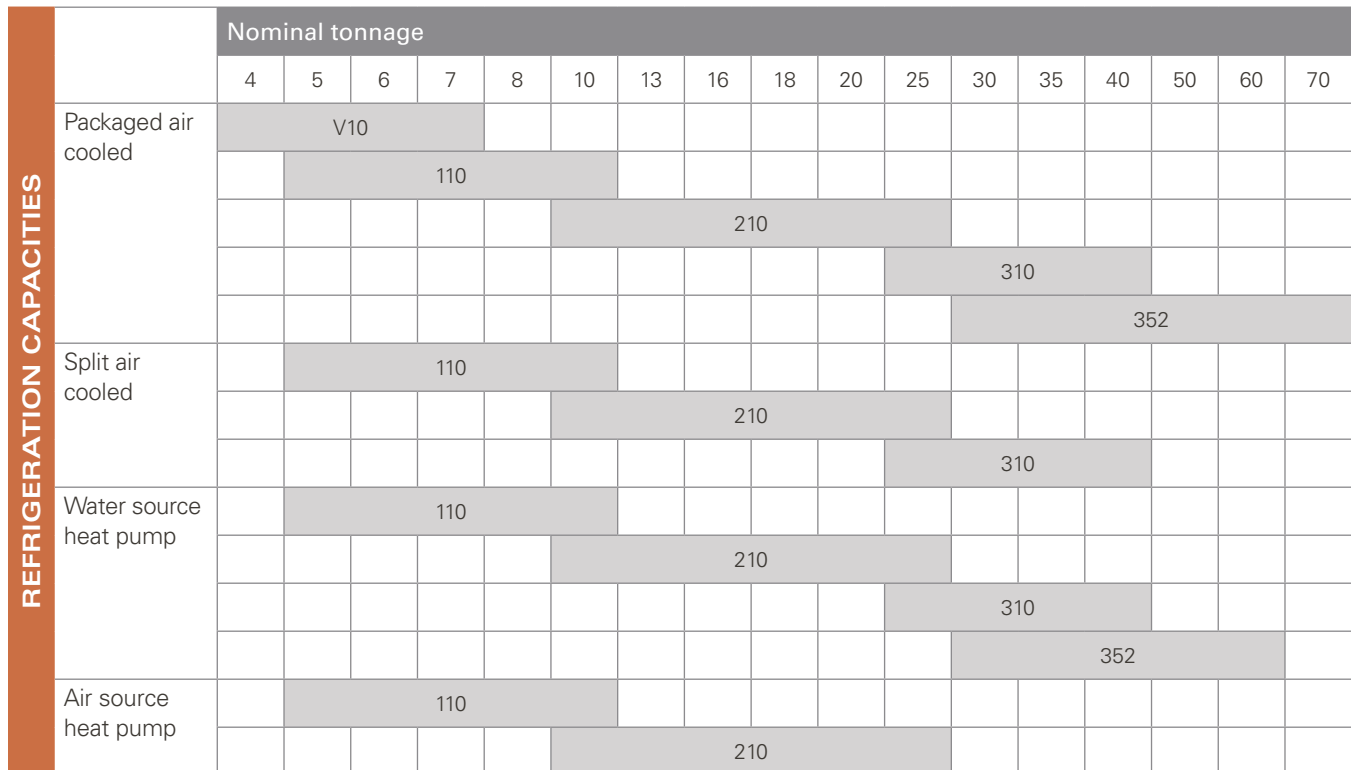

		Input capacity (MBh)													
		75	100	150	200	250	300	400	500	600	700	800	1,000	1,200	
HEATING CAPACITIES	Indirect gas, temperator	V10 (indirect gas only)													
		110													
		210													
		310													
		352 (indirect gas only)													
		Electric capacity (kW)													
		10	15	20	30	40	50	60	80	90	100	125	150	175	200
HEATING CAPACITIES	SCR electric	110													
		210													
		310													
		352													
Electric heat sizes shown do not account for unit voltage.															